


3301 d



# LEAD SEALS AND PLIERS

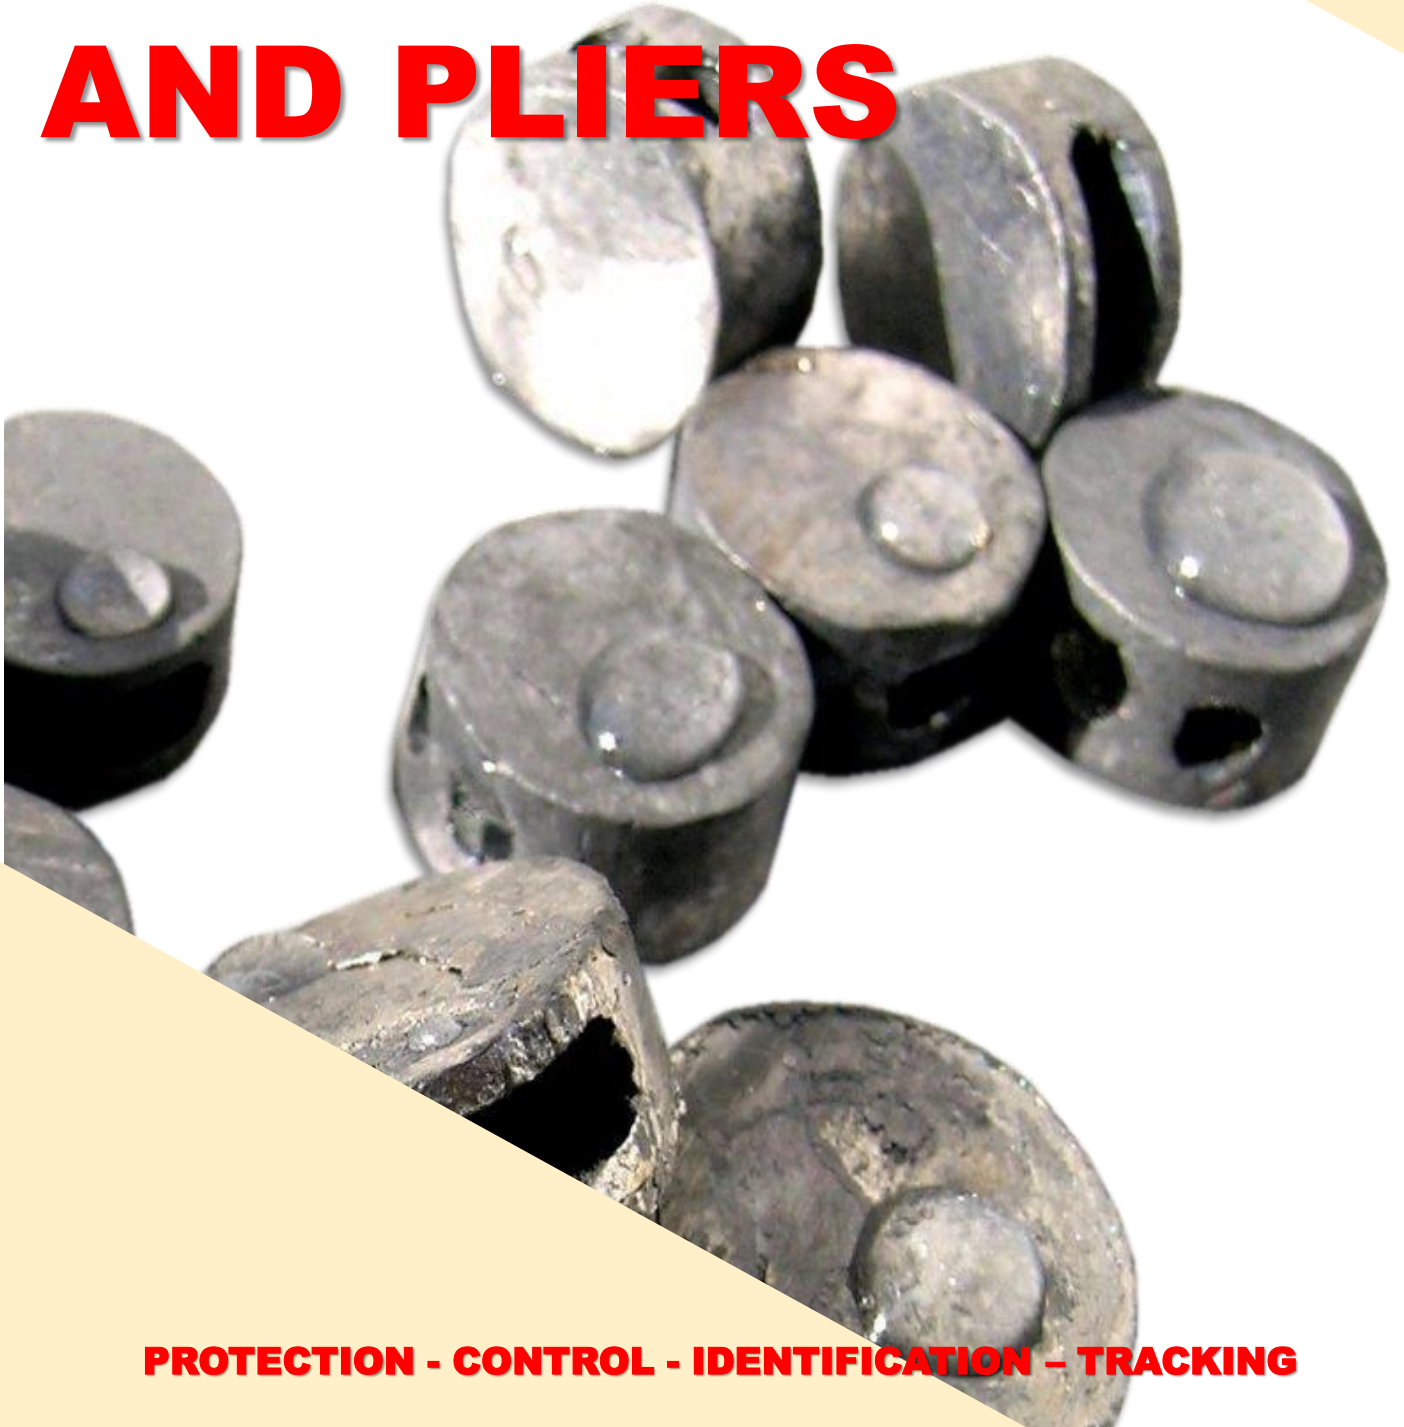

**PROTECTION - CONTROL - IDENTIFICATION - TRACKING**




The system to engrave with pliers a piece of lead to which is possible to insert any sealing wire or twine and then press it with a pliers is called lead seal.

The lead seal is basically the symbol that comes first the authentic signature.

Indeed, the less script was spread, the more it was necessary to adopt another way for a guarantee and personal recognition system which had to be difficult to be cloned.

The lead seal of ancient origin (more than 3.000 years ago) was used to close various types of boxes and protect the integrity of the content. This was the way to ensure the origin of goods and to identify the owner and its properties.

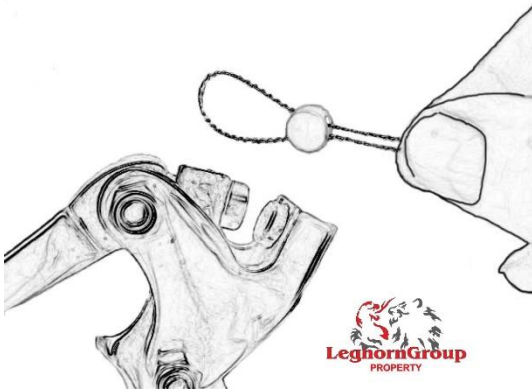

Currently, lead seals are very used to ensure water, electricity and gas meters from any tamper event.

Seals may be customised and have progressive numbering.

Once the sealing wire is passed through the appropriate points which are sensitive for the energy supply, the same wire is insert in the seals holes and blocked with appropriate pliers for seals.

Also pliers may be customised with logo or numbers or alphanumeric codes.





ARTICLE	DIAMETER mm	THICKNESS mm	Q.ty per KG
Lead Seal	16	6,3	98
Lead Seal	14	6	150
Lead Seal	13	6	170
Lead Seal	12	5,5	230
Lead Seal	11	5,8	255
Lead Seal	10	5	315
Lead Seal	8	5	440

**Material : 99,9% of lead**



**Art 464/175** : Length 175 mm  
for seals with a diameter up to  
12mm

**Art 464/200** : Length 200 mm  
for seals with a diameter up to 15mm



**Art 466/175** : Length 175 mm  
for seals with a diameter up to 12mm

**Art 466/220** : Length 220 mm  
for seals with a diameter up to 15mm

## ENGRAVING EXAMPLES







**GALVANIZED**  
sealing wire for  
lead seals



**STAINLESS STEEL**  
sealing wire for  
lead seals



**COPPER** sealing  
wire for lead seals



**BRASS** sealing  
wire for lead seals




**NYLON-COPPER**  
sealing wire for  
lead seals



**PLASTIFIED**  
**STAINLESS STEEL**  
cable.

All LeghornGroup's sealing wire are suitable for any wire seal.  
They can be supplied in reels of variable length or in parts which vary from the needs of the customer.

Sealing wire with a diameter up to 2,5mm may be designed upon request.

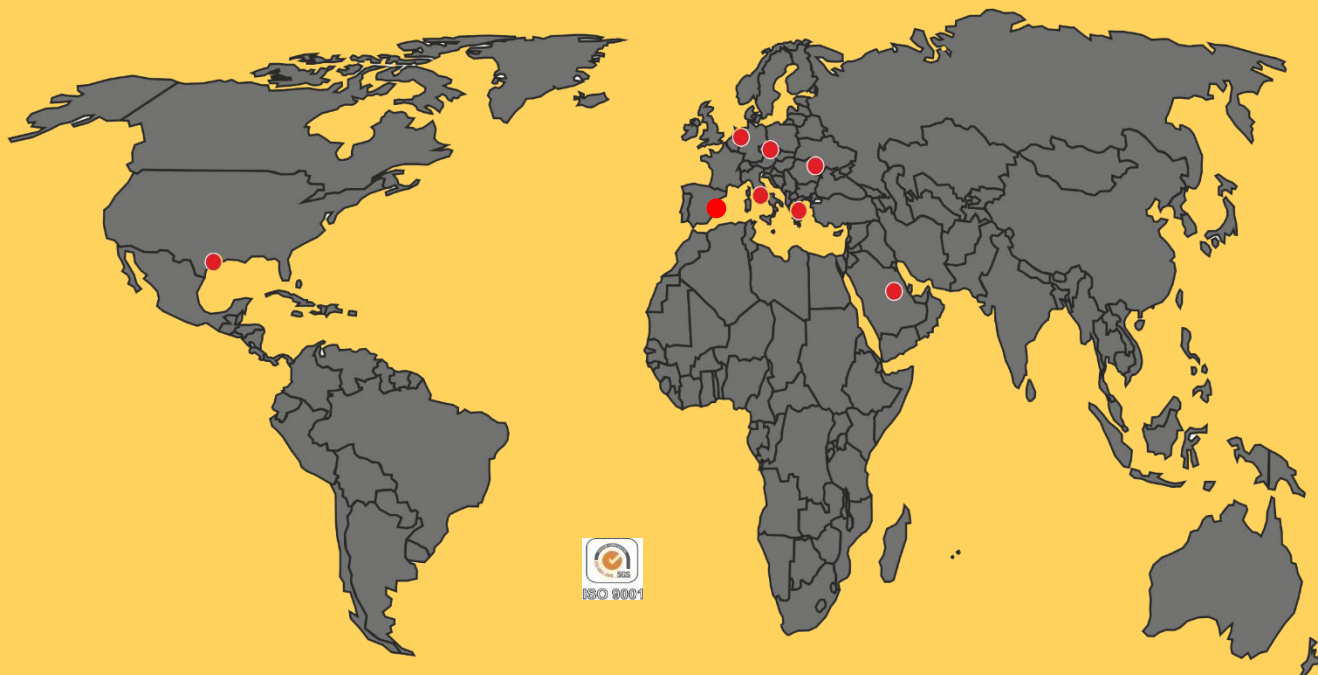General e-mail: [info@leghorngroup.com](mailto:info@leghorngroup.com)

**LeghornGroup ITALY**  
[www.leghorngroup.it](http://www.leghorngroup.it)

**LeghornGroup USA**  
[www.leghorngroup.com](http://www.leghorngroup.com)

**LeghornGroup BELGIUM**  
[www.leghorngroup.be](http://www.leghorngroup.be)  
[www.leghorngroup.nl](http://www.leghorngroup.nl)

**LeghornGroup SAUDI ARABIA**  
[www.leghorngroup.sa](http://www.leghorngroup.sa)

**LeghornGroup CZECH REP.**  
[www.leghorngroup.cz](http://www.leghorngroup.cz)  
[www.leghorngroup.pl](http://www.leghorngroup.pl)

**LeghornGroup GREECE**  
[www.leghorngroup.gr](http://www.leghorngroup.gr)

**LeghornGroup MOLDOVA**  
[www.leghorngroup.ro](http://www.leghorngroup.ro)

**LeghornGroup SPAIN**  
[www.leghorngroup.es](http://www.leghorngroup.es)



**LeghornGroup**

*Protection - Control - Identification - Tracking*

*Since 1978*

**LeghornGroup srl**

34/36, Via degli Arrotini - 57121 Livorno, Tuscany, Italy

Ph: +39 0586 406376 - Fax: +39 0586 407621 - [www.leghorngroup.com](http://www.leghorngroup.com) - [info@leghorngroup.com](mailto:info@leghorngroup.com)

**PROTEZIONE - CONTROLLO - IDENTIFICAZIONE - TRACCIABILITA'**